
20 Ib ROOF LOAD SIDEWALL OPENING PIER LOAD 16' BOX WIDTH	SIDEWALL OPENING (FT) REQUIRED PIER LOAD (LBS)						
	3	4	5	6	8	10	
	1244	1413	1581	1750	2088	2425	

\*FOR 30 lb & 40 lb ROOF LOAD REFER TO TABLES 7 & 7a IN THE INSTALLATION MANUAL.

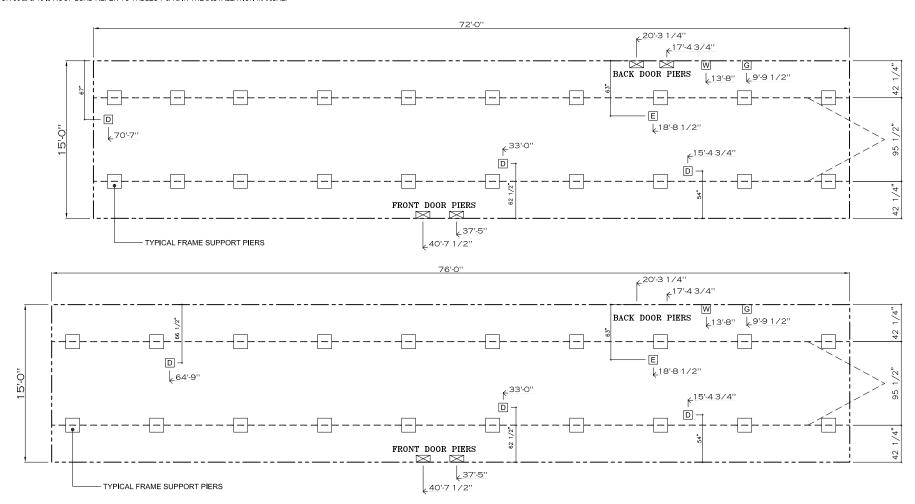

## NOTES:

- REFER TO TABLES 6 AND 6a IN THE INSTALLATION MANUAL FOR LOAD ON FRAME PIER FOOTINGS FOR HOMES THAT DO NOT REQUIRE PERIMETER BLOCKING. REFER TO TABLES 7 AND 7a IN THE INSTALLATION MANUAL FOR LOAD ON FRAME PIER FOOTINGS FOR HOMES THAT REQUIRE PERIMETER BLOCKING. REFER TO TABLES 10 AND 10a TO DETERMINE FOOTING SIZE FOR ALL PIERS.
- REFER TO TABLE 9 FOR PIER CONFIGURATION AND MAXIMUM ALLOWABLE HEIGHTS. CROSS REFERENCE THE PIER HEIGHT WITH THE MAXIMUM ALLOWABLE FLOOR HEIGHT LISTED IN THE FRAME TIEDOWN CHARTS (TABLE 18, 19, AND 20).
- 3. THE MAXIMUM SPACING FOR FRAME SUPPORT PIERS FOR 8" I-BEAMS IS 8 FEET, 10" & 12" I-BEAMS IS 10 FEET.
- 4. SERVICE DROP LOCATIONS IDENTIFIED ARE
- APPROXIMATE.

  5. FLOOR WIDTH SHOWN IS FOR STANDARD PRODUCT ONLY.
  CONTACT THE MFG FACILITY FOR SPECIFICATIONS OF
  OPTIONS ORDERED.

## SERVICE DROP LEGEND E = ELECTRICAL DROP W = WATER INLET

D = DWV PLUMBING DROP

G = GAS INLET

PIER LEGEND

□ = PIER MAIN BEAM

□ = PIER PERIMETER

■ = PIER PORCHRECESSED ENTRY

1080/1140 SQ.FT. (STD PLAN "CONDITIONED") N/A SQ.FT. (W/OPT. PORCH/RECESS "CONDITIONED")

CMH	Model #: GR	A16723A	Drawing #:		
MANUFACTURING	Date: 10/27/21	Scale: N.T.S.	375124		
Product Designer: E HARDWICK	16 X 72/76 Grand Living				

FRAME PIERS